


# **AUTOMATIC SOLID STATE ALL PURPOSE FILTER**

**Model NSAPFSSA**  
(10" x 47" Tank)

**Model NSAPFXLA**  
(12" x 54" Tank)

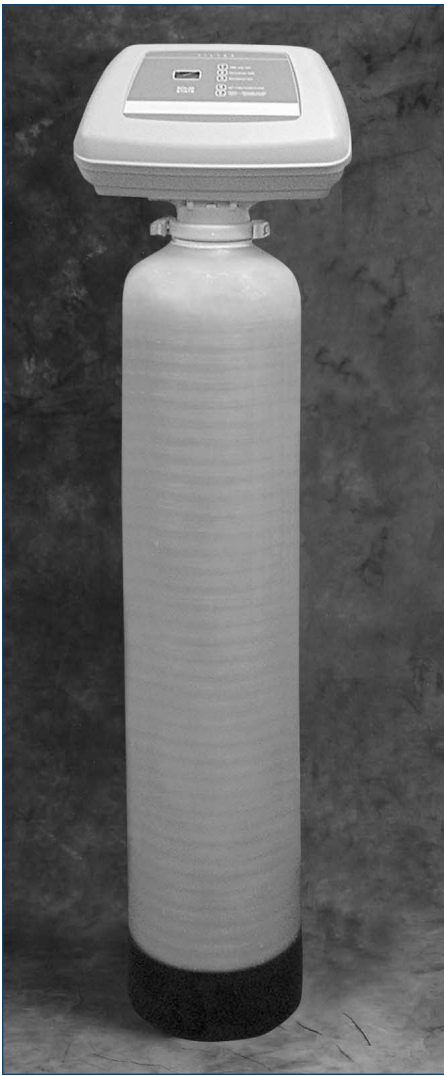


The professional contractor can select the mineral and configuration for the filter that best treats the problem water. The North Star All Purpose Filters do not include filtering mineral, sand, or gravel.

## **All Purpose Filter Solid State Control**

(24 Volt Transformer Included)

Provides precise control of all functions. Has a capacitor to maintain setting up to six hours. Has vacation setting and extra regeneration for high water use.

## **Dimensions**

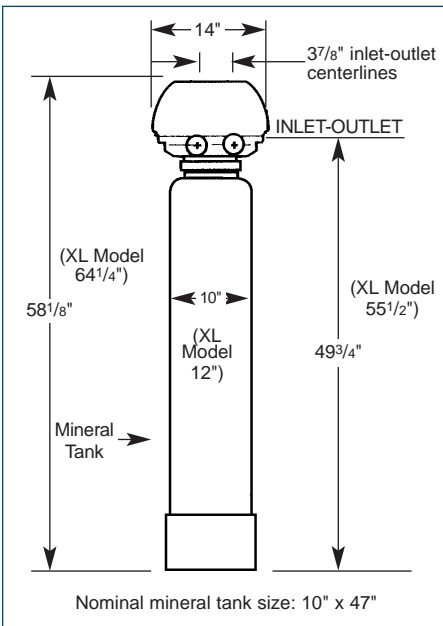

## **Specifications**

	<b>NSAPFSSA 10" x 47" Tank</b>	<b>NSAPFXLA 12" x 54" Tank</b>
Type of mineral	not supplied	not supplied
Recommended amount of mineral (cu. ft.)	1.0	2.0
Recommended amount of gravel base (lbs.)	17	29
Recommended amount of filter sand (lbs.)	10	15
Inlet water pressure limits (PSI)	20 - 125	20 - 125
Maximum water temperature (°F)	120	120
Minimum inlet water flow (gal/hour)	270	420
Backwash flow rate (gal/min)	2.5, 5, or 7	2.5, 5, or 7
Pipe size	1"	1"

**North Star**<sup>®</sup>  
WATER CONDITIONING

P.O. BOX 64310  
ST. PAUL, MN 55164-4310  
1-800-972-0135  
[www.northstar.conditioning.com](http://www.northstar.conditioning.com)

